

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 April 2005 (07.04.2005)

PCT

(10) International Publication Number
WO 2005/030447 A1

(51) International Patent Classification⁷: **B27L 1/00**

(21) International Application Number:
PCT/SE2003/001528

(22) International Filing Date: 2 October 2003 (02.10.2003)

(25) Filing Language: Swedish

(26) Publication Language: English

(71) Applicant (for all designated States except US): **IGGESUND TOOLS AB** [SE/SE]; Box 6, S-825 21 Iggesund (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ERIKSSON, Bror** [SE/SE]; Sven 2551, S-825 93 Njutånger (SE).

(74) Agent: **AWAPATENT AB**; Box 53, S-826 22 Söderhamn (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **BARKING DEVICE AND BARKING TOOL**

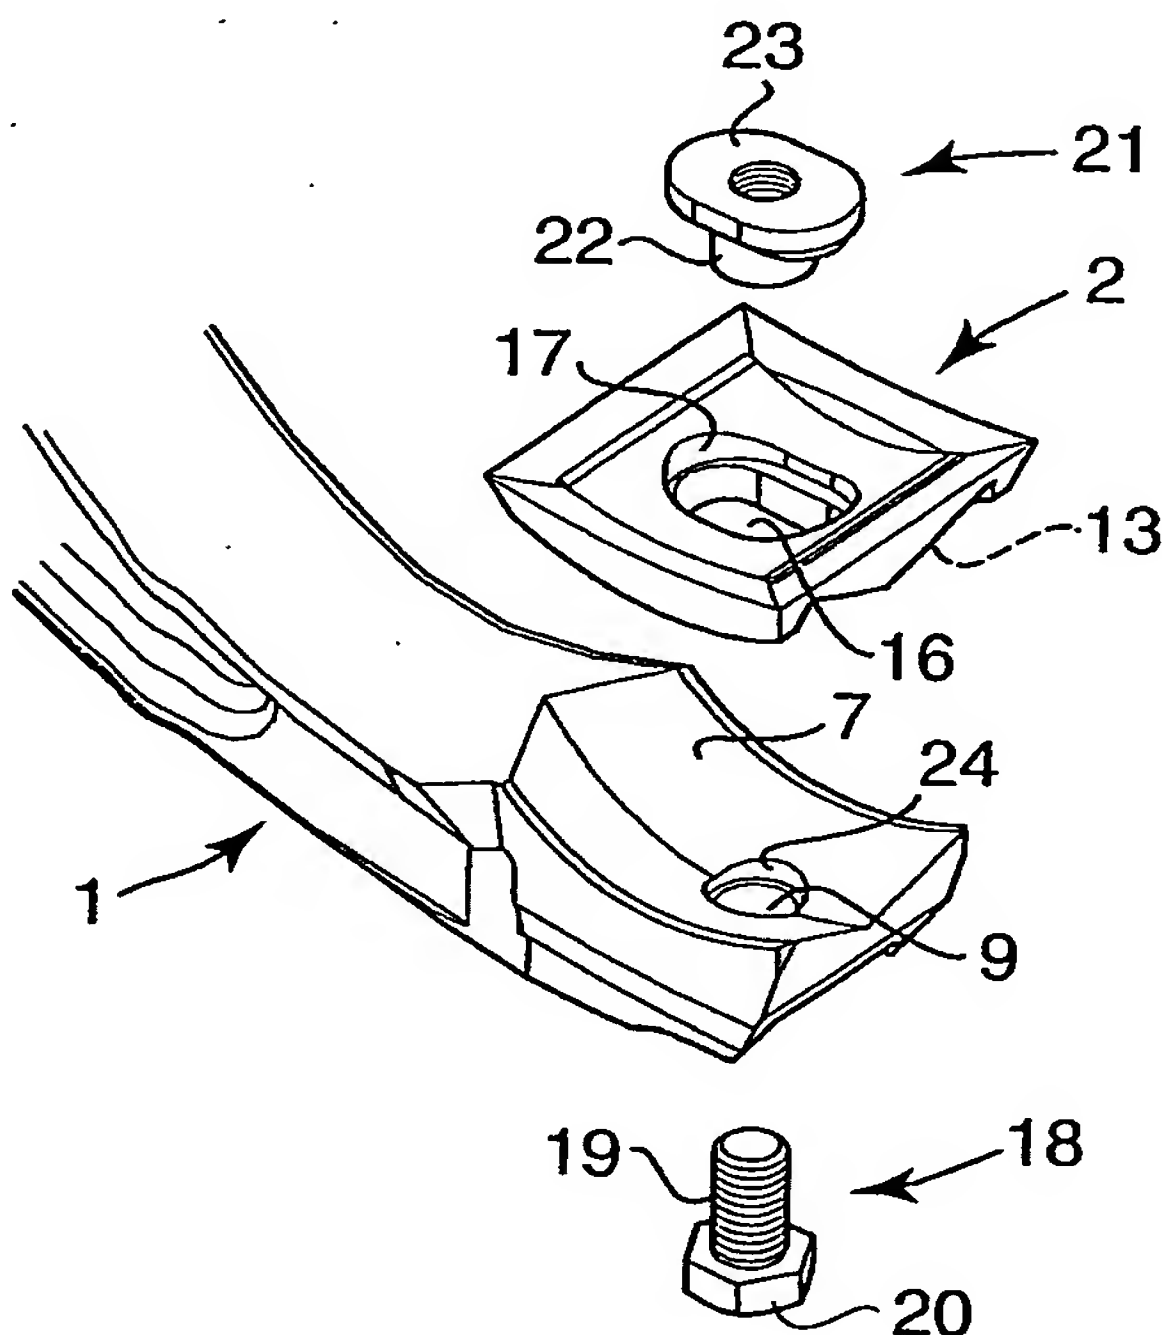

(57) Abstract: The invention relates to a barking device comprising a barking arm (1) and a barking tool (2) which is mountable in a tool seat of the barking arm. The barking tool comprises a convex mounting surface (13), while the seat surface (7) of the barking arm is concave. The barking tool is, with the aid of a connecting means, mountable in the tool seat and displaceable by rotating displacement. The connecting means comprises a screw (18) and a sleeve-like nut (21). The head (20, 23) of one of the connecting means parts (18, 21) is designed to prevent displacement and rotation.

WO 2005/030447 A1